



Sveaverken

Mobile auger

152

200

Folding and towable

Robust screw for easy and effective transfer of the grain

- Available in different versions
- Towable up to 25 km/h when folded
- Powerful engine to reach the advertised flow rate
- The hopper is equipped with a lockable input control
- Frame, transmission and tubing are galvanized
- Equipped with a warning triangle which becomes an anti-tipping element in working conditions
- Startbox with emergency stop
- The hopper is tiltable to facilitate filling
- The chassis is mounted on 13 inches pneumatic tires.
- Jockey wheel as an option


Mobile auger
152

Mobile auger
200



Mobile auger 152


- Flow 34 tons per hour
- Transmission with automatic belt tension

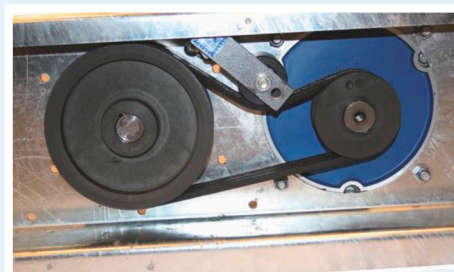

Transmission Mobile auger 152.
Automatic tension of the poly V-belt.

Mobile auger 200

- Flow 65 tons per hour
- Transmission with automatic chain tension

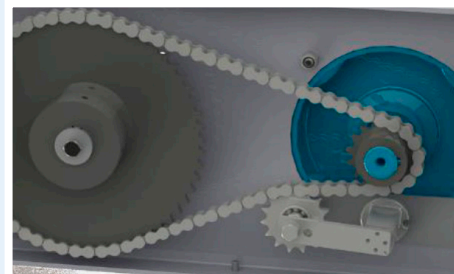

Transmission Mobile auger 200.
Automatic tension of the chain.

Technical data

Mobile auger	152	200
Length, m	12	12
Transmission	V-belt x 3	Unic chain
Rotation speed r/min	660	420
Diameter tube, mm	152	200
Thickness tube, mm	2,5	2,5
Outside diameter, mm	133	185
Screw thread, mm	135	195
Lifting height, m	2,5-9,5	2,5-9,5

Engine

Mobile auger	152	200
Power, kW	7,5	11
Length, m	12	12

Motor IEC 34-1, mounting type B5.

Capacity

152		200	
660 rpm	t/h	420 rpm	t/h
15°	35	15°	66
45°	34	45°	65
50°	30	50°	60

Flow: wheat 0,75 t/m³, maximum humidity 15%.
A higher humidity or an improperly cleaned grain can reduce the flow.



The transport locking triangle becomes an anti-tipping triangle during use.



Robust hinge with a bearing in bronze.



Jockey wheel as an option.

Changes possible. All rights reserved.
2018.11